

ALPHA[®] OM-550 Solder Paste

No Clean, Low Temperature, Non-Eutectic, Pin Testable, Rohs Compliant Solder Paste for Assemblies with Temperature Sensitive Substrates, Components, & High Warpage Chips

DESCRIPTION

ALPHA's OM-550 is a new low temperature chemistry paired with **ALPHA's HRL1** alloy. This alloy was designed to exhibit improved drop shock and thermal cycling performance versus existing low temperature alloys. Together, the flux and alloy blend to make a product that has the characteristics of a modern solder paste designed for motherboards but with the ability to reflow at lower temperatures therefore minimizing NWO and HIP defects in complex assemblies.

All components used with **ALPHA OM-550** must be lead-free to eliminate the formation of tin/lead/bismuth intermetallic which has a melting point under 100 °C.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES & BENEFITS

- Low reflow peak temperature ~175 °C (~185 to 195 °C for mixed alloy process)
- Reduction of warpage up to 99% (component and board/substrate) vs SAC process
- Excellent NWO Performance
- Excellent HIP Performance
- Improves BGA mechanical reliability compared to other low-temp alloys
- Fine Feature Printing/Reflow Capable
- Long Stencil Life - 12 Hours with continuous printing
- Less residue spread
- Good voiding performance on various packages (BGA, MLF, DPAK, LGA),
- Reflowable in air or nitrogen
- Provides efficiencies in both energy and cost

PRODUCT INFORMATION

<u>Alloys:</u>	HRL1 alloy
<u>Powder Size:</u>	Type 4 & Type 5
<u>Packaging Sizes:</u>	500 gram jars & 30cc syringe
<u>Lead Free:</u>	RoHS Directive EU/2015/863; amending Annex II of 2011/65/EU
<u>Halogen Content:</u>	Zero Halogen

TECHNICAL DATA


Category	Results	Procedures/Remarks
Chemical Properties		
Activity Level	ROL0	IPC J-STD-004B
Halide Content	Pass	IPC J-STD-004B
Fluoride Spot Test	Pass	IPC J-STD-004B
Halogen Test	Pass	Zero Halogen
Ag Chromate Test	Pass	IPC J-STD-004B
	Pass	JIS-Z-3197-1999 8.1.4.2.3
Copper Mirror Test	Pass	IPC J-STD-004B
	Pass	JIS-Z-3197-1999 8.4.2
Copper Corrosion Test	Pass	IPC J-STD-004B
	Pass	JIS-Z-3197-1999 8.4.1
Electrical Properties		
SIR (7 days, 40°C/90%RH, 12 V bias)	Pass	IPC-TM-650 2.6.3.7 (J-STD-004B)
Bellcore SIR	Pass	Bellcore GR-78 Core Issue1, September 1997 (Section 13)
Electromigration	Pass	IPC-TM-650 (2.6.14.1) as per J-STD-0 04B
Bellcore Electromigration	Pass	Bellcore GR78-CORE (Pass=final > initial/10)
Physical Properties		
Color	Clear, Colorless Flux Residue	
Tack Force vs. Humidity	Pass	JIS-Z-3284-3:2014, 4.5
	Pass	IPC J-STD-005
Solder Ball	Preferred	IPC J-STD-005
Spread	>80%	JIS-Z-3198-3
Wetting Time	Pass	Rhesca Test, zero cross time T0
Stencil Life	>12 Hours	@ 50% RH 23 °C (74°F)
Cold/Printing Slump	No bridges	JIS-Z-3284-3:2014, 4.3
	No bridges	IPC J-STD-005
Hot Slump	No bridges	JIS-Z-3284-3:2014, 4.4
	No bridges	IPC J-STD-005
Dryness Test (Talc)	Pass	JIS-Z-3197-1999 8.5.1

PROCESSING GUIDELINES

Storage & Handling	Printing	Reflow (See Fig. 1)	Cleaning
1. Refrigerate to guarantee stability @ 0 to 10 °C (32 to 50 °F). When stored in these conditions, shelf life of paste is 6 months for T4 paste and 3 months for T5 paste. 2. Paste can be stored for 2 weeks at room temperature up to 25 °C (77 °F) prior to use. 3. When refrigerated, warm up paste container to room temperature for up to 4 hrs. Paste must be 19 °C (66 °F) before processing. Verify paste temperature with a thermometer to ensure paste is at 19 °C (66 °F) or greater before setup of printer. 4. Paste can be manually stirred before use. A rotating / centrifugal force mixing operation is not required. If a rotating / centrifugal force mixing is used, 30 to 60 seconds at 300 RPM is adequate. 5. Do not remove worked paste from stencil and mix with unused paste in jar. This will alter the rheology of unused paste. 6. These are starting recommendations and all process settings should be reviewed independently.	STENCIL: Recommend Alpha's ALPHA CUT or ALPHA FORM stencils @ 0.050 to 0.150 mm (4 to 6 mil) thick for 0.4 to 0.5 mm (0.016" or 0.020") pitch. Stencil design is subject to many process variables. Contact your local Alpha stencil site for advice. SQUEEGEE: Metal (recommended) PRESSURE: 1.5 lb/in successfully tested at Alpha SPEED: 100mm/s tested at Alpha PASTE ROLL: 1.5 to 2.0 cm diameter and make additions when roll reaches 1-cm (0.4") diameter (min). Max roll size will depend upon blade. STENCIL RELEASE SPEED: 7 mm/sec successfully used. LIFT HEIGHT: 8 to 14mm (0.31 to 0.55")	ATMOSPHERE: Clean-dry air or nitrogen atmosphere. PROFILE (HRL1 Alloy): The following settings have been determined to give optimal result but other settings give excellent results as well. <i>*note 1 & note 2</i> Slope: 40 to 100 °C, 1 to 3 °C/sec Soak: 100 to 120 °C 60 to 100 Sec TAL: >151 °C – 80 to 120 Sec Peak: 185 to 195 °C A 0.4 to 0.6 paste volume to sphere volume ratio is recommended	ALPHA OM-550 residue is designed to remain on the board after reflow. Misprints and stencil cleaning may be done with ALPHA SM-110E, ALPHA SM-440, ALPHA BC-2200 cleaners.

REFLOW PROFILES

Soak Profiles

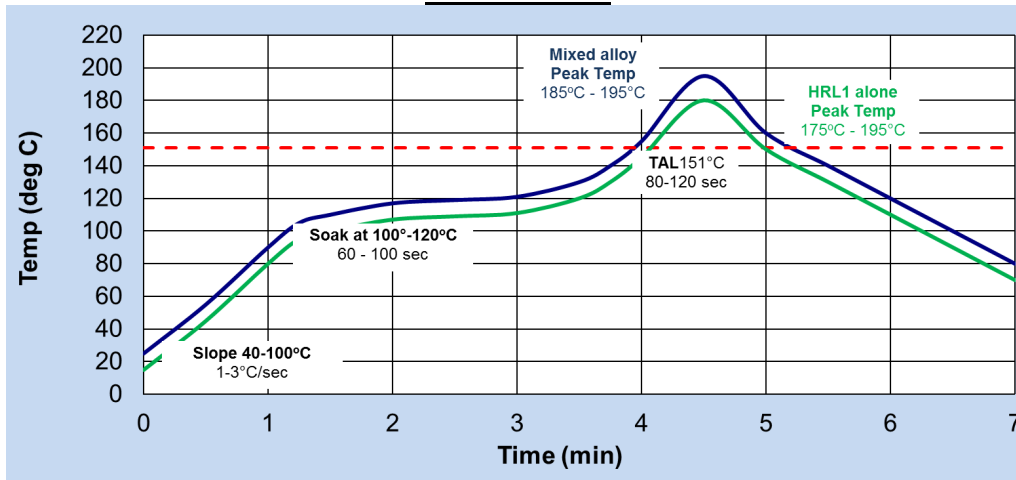


Suggested Reflow Profile for HRL1 alloy in mixed alloy process and HRL1 alone.

***Note 1:** With lower peak temperatures, TAL recommendation is a general guide for total combined reflow exposure time. TAL needs to be adjusted/extended in order to form a proper joint. Reflow profile suggested above represents single exposure to achieve optimized joint. Please consult your local Alpha representative for assemblies requiring more than a single reflow exposure.

****Note 2:** 185 to 195 °C peak reflow applies to mixed solder joints.

For the above profile a 0.4 to 0.6 paste volume to sphere volume ratio is recommended.

Straight Ramp Profile

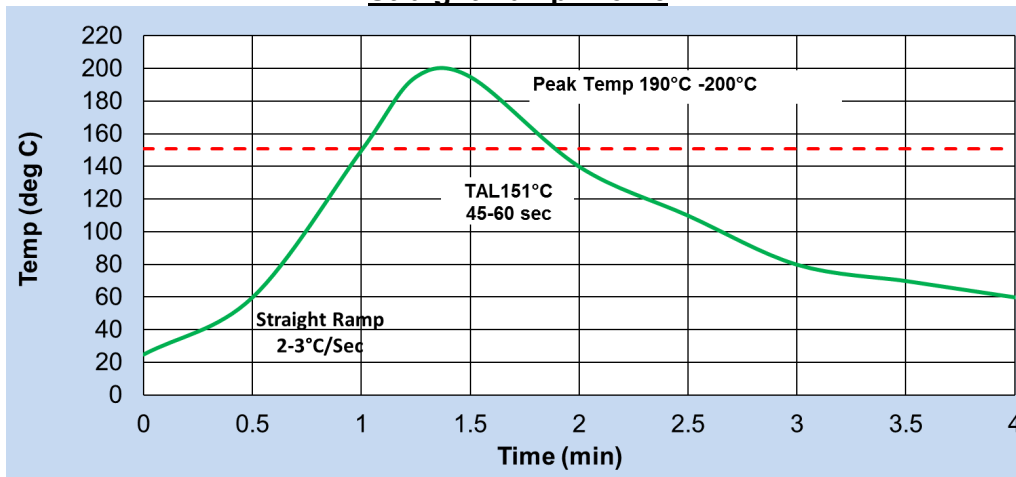

*****Note 3:** Straight ramps profile is meant for pure joints only.

RECYCLING SERVICES

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams.

Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area.



SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available.**

STORAGE

ALPHA OM-550 should be stored in a refrigerator upon receipt at 0 to 10 °C (32 to 50 °F). ALPHA OM-550 should be permitted to reach room temperature before unsealing its package prior to use (see handling procedures on page 3). This will prevent moisture condensation build up in the solder paste.

CONTACT INFORMATION

www.macdermidalpha.com

North America 140 Centennial Avenue Piscataway, NJ 08854 1.800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400	Asia 8/F., Two Sky Parc 51 Hung To Road Kwun Tong, Kowloon, Hong Kong, SAR China 852.2500.5365
---	---	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.